


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF DATA GENERAL CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION

REV.	DESCRIPTION	DRFTG.	APP. BY	DATE
10	ECO # 3855	TJK	rw	5-77
09	ECO # 3569	RBS	rw	6-76
08	ECO # 2460	R.N.C.	rw	4-77
REV	DESCRIPTION	DRFTG.	APP. BY	DATE

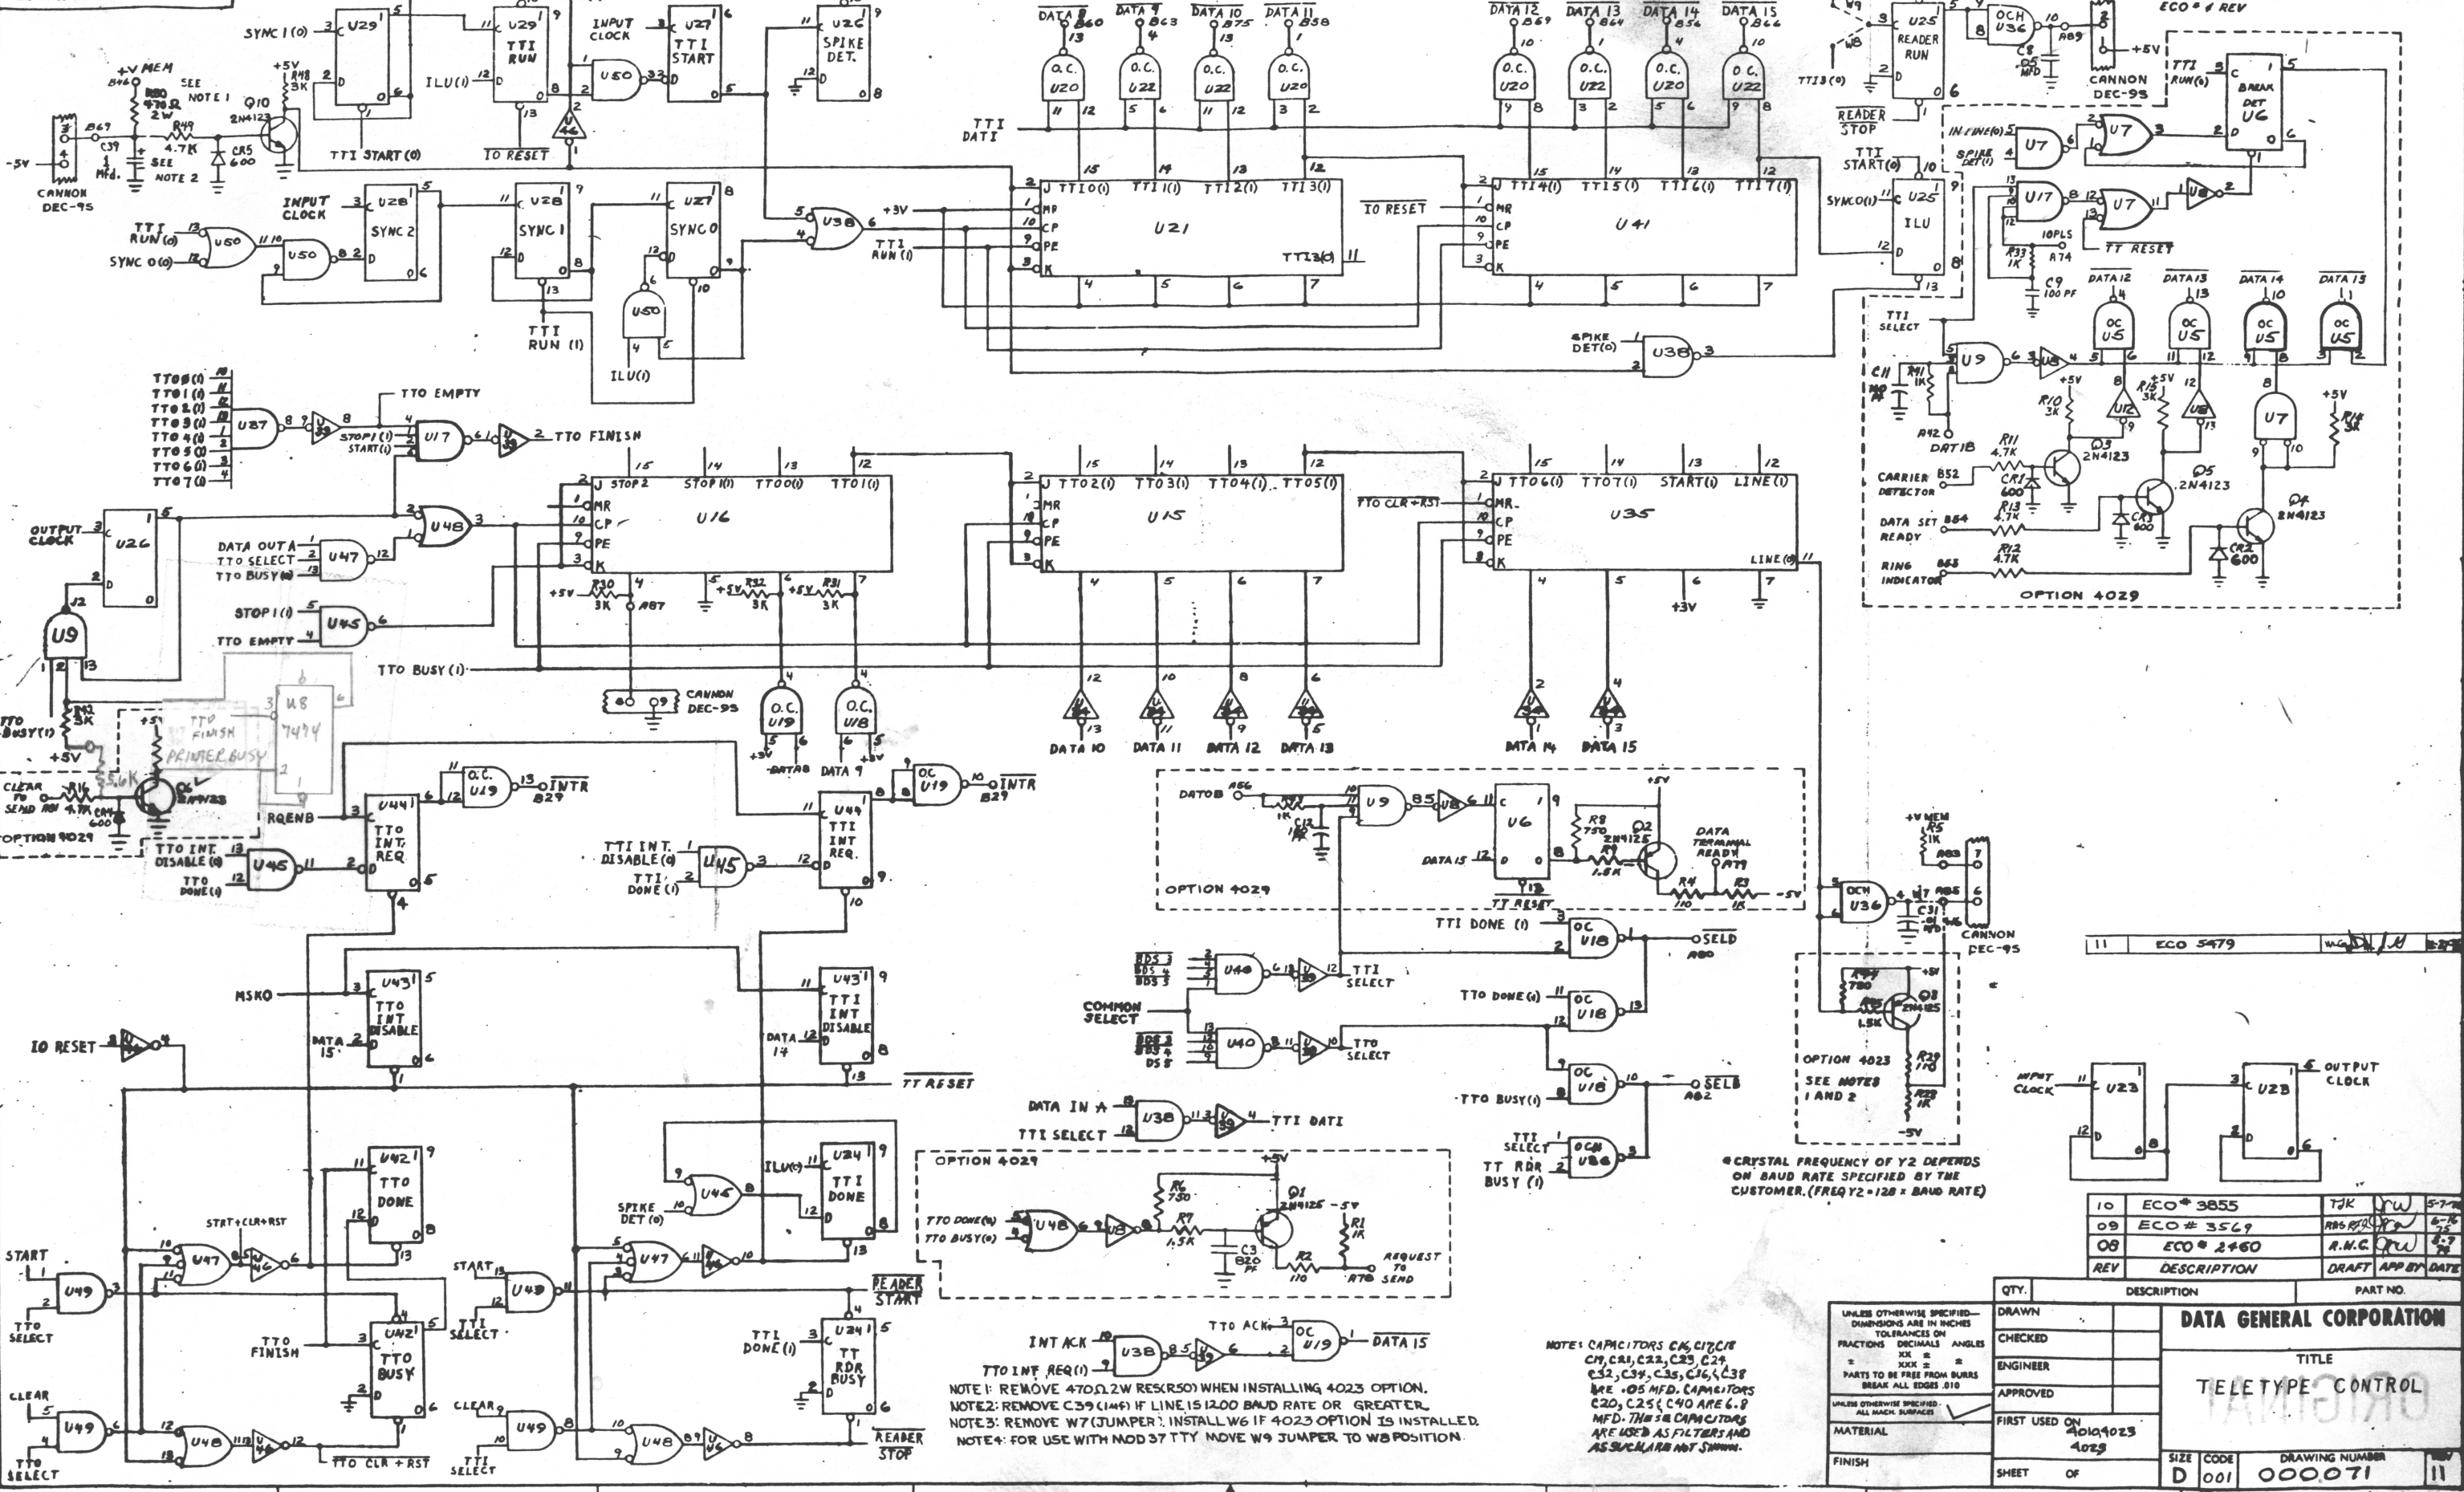

ECO 5479

QTY.	DESCRIPTION	PART NO.
10	ECO # 3855	TJK rw 5-77
09	ECO # 3569	RBS rw 6-76
08	ECO # 2460	R.N.C. rw 4-77
REV	DESCRIPTION	DRFTG. APP. BY DATE

UNLESS OTHERWISE SPECIFIED—DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS DECIMALS ANGLES		DRAWN		DATA GENERAL CORPORATION	
XX = .001		CHECKED		TITLE	
XXK = .005		ENGINEER		TELETYPE CONTROL	
XXKX = .010		APPROVED		DRAWING NUMBER	
PARTS TO BE FREE FROM BURRS BREAK ALL EDGES .010		FIRST USED ON		000071	
UNLESS OTHERWISE SPECIFIED—ALL MACH SURFACES		MATERIAL		SIZE CODE	
FINISH		SHEET OF		DRAWING NUMBER	
		D		001	

NOTE 1: REMOVE 470.2W RES(C39) WHEN INSTALLING 4023 OPTION.
 NOTE 2: REMOVE C39 (14F) IF LINE IS 1200 BAUD RATE OR GREATER.
 NOTE 3: REMOVE W7 (JUMPER), INSTALL W6 IF 4023 OPTION IS INSTALLED.
 NOTE 4: FOR USE WITH MOD 37 TTY MOVE W9 JUMPER TO WB POSITION.

*CRYSTAL FREQUENCY OF Y2 DEPENDS ON BAUD RATE SPECIFIED BY THE CUSTOMER. (FREQ Y2 = 128 * BAUD RATE)