


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DATA GENERAL CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.

REVISIONS				
REV.	DESCRIPTION	DRFTG.	APP. BY	DATE
01	ECO # 2575	R.W.C.		5-20-74

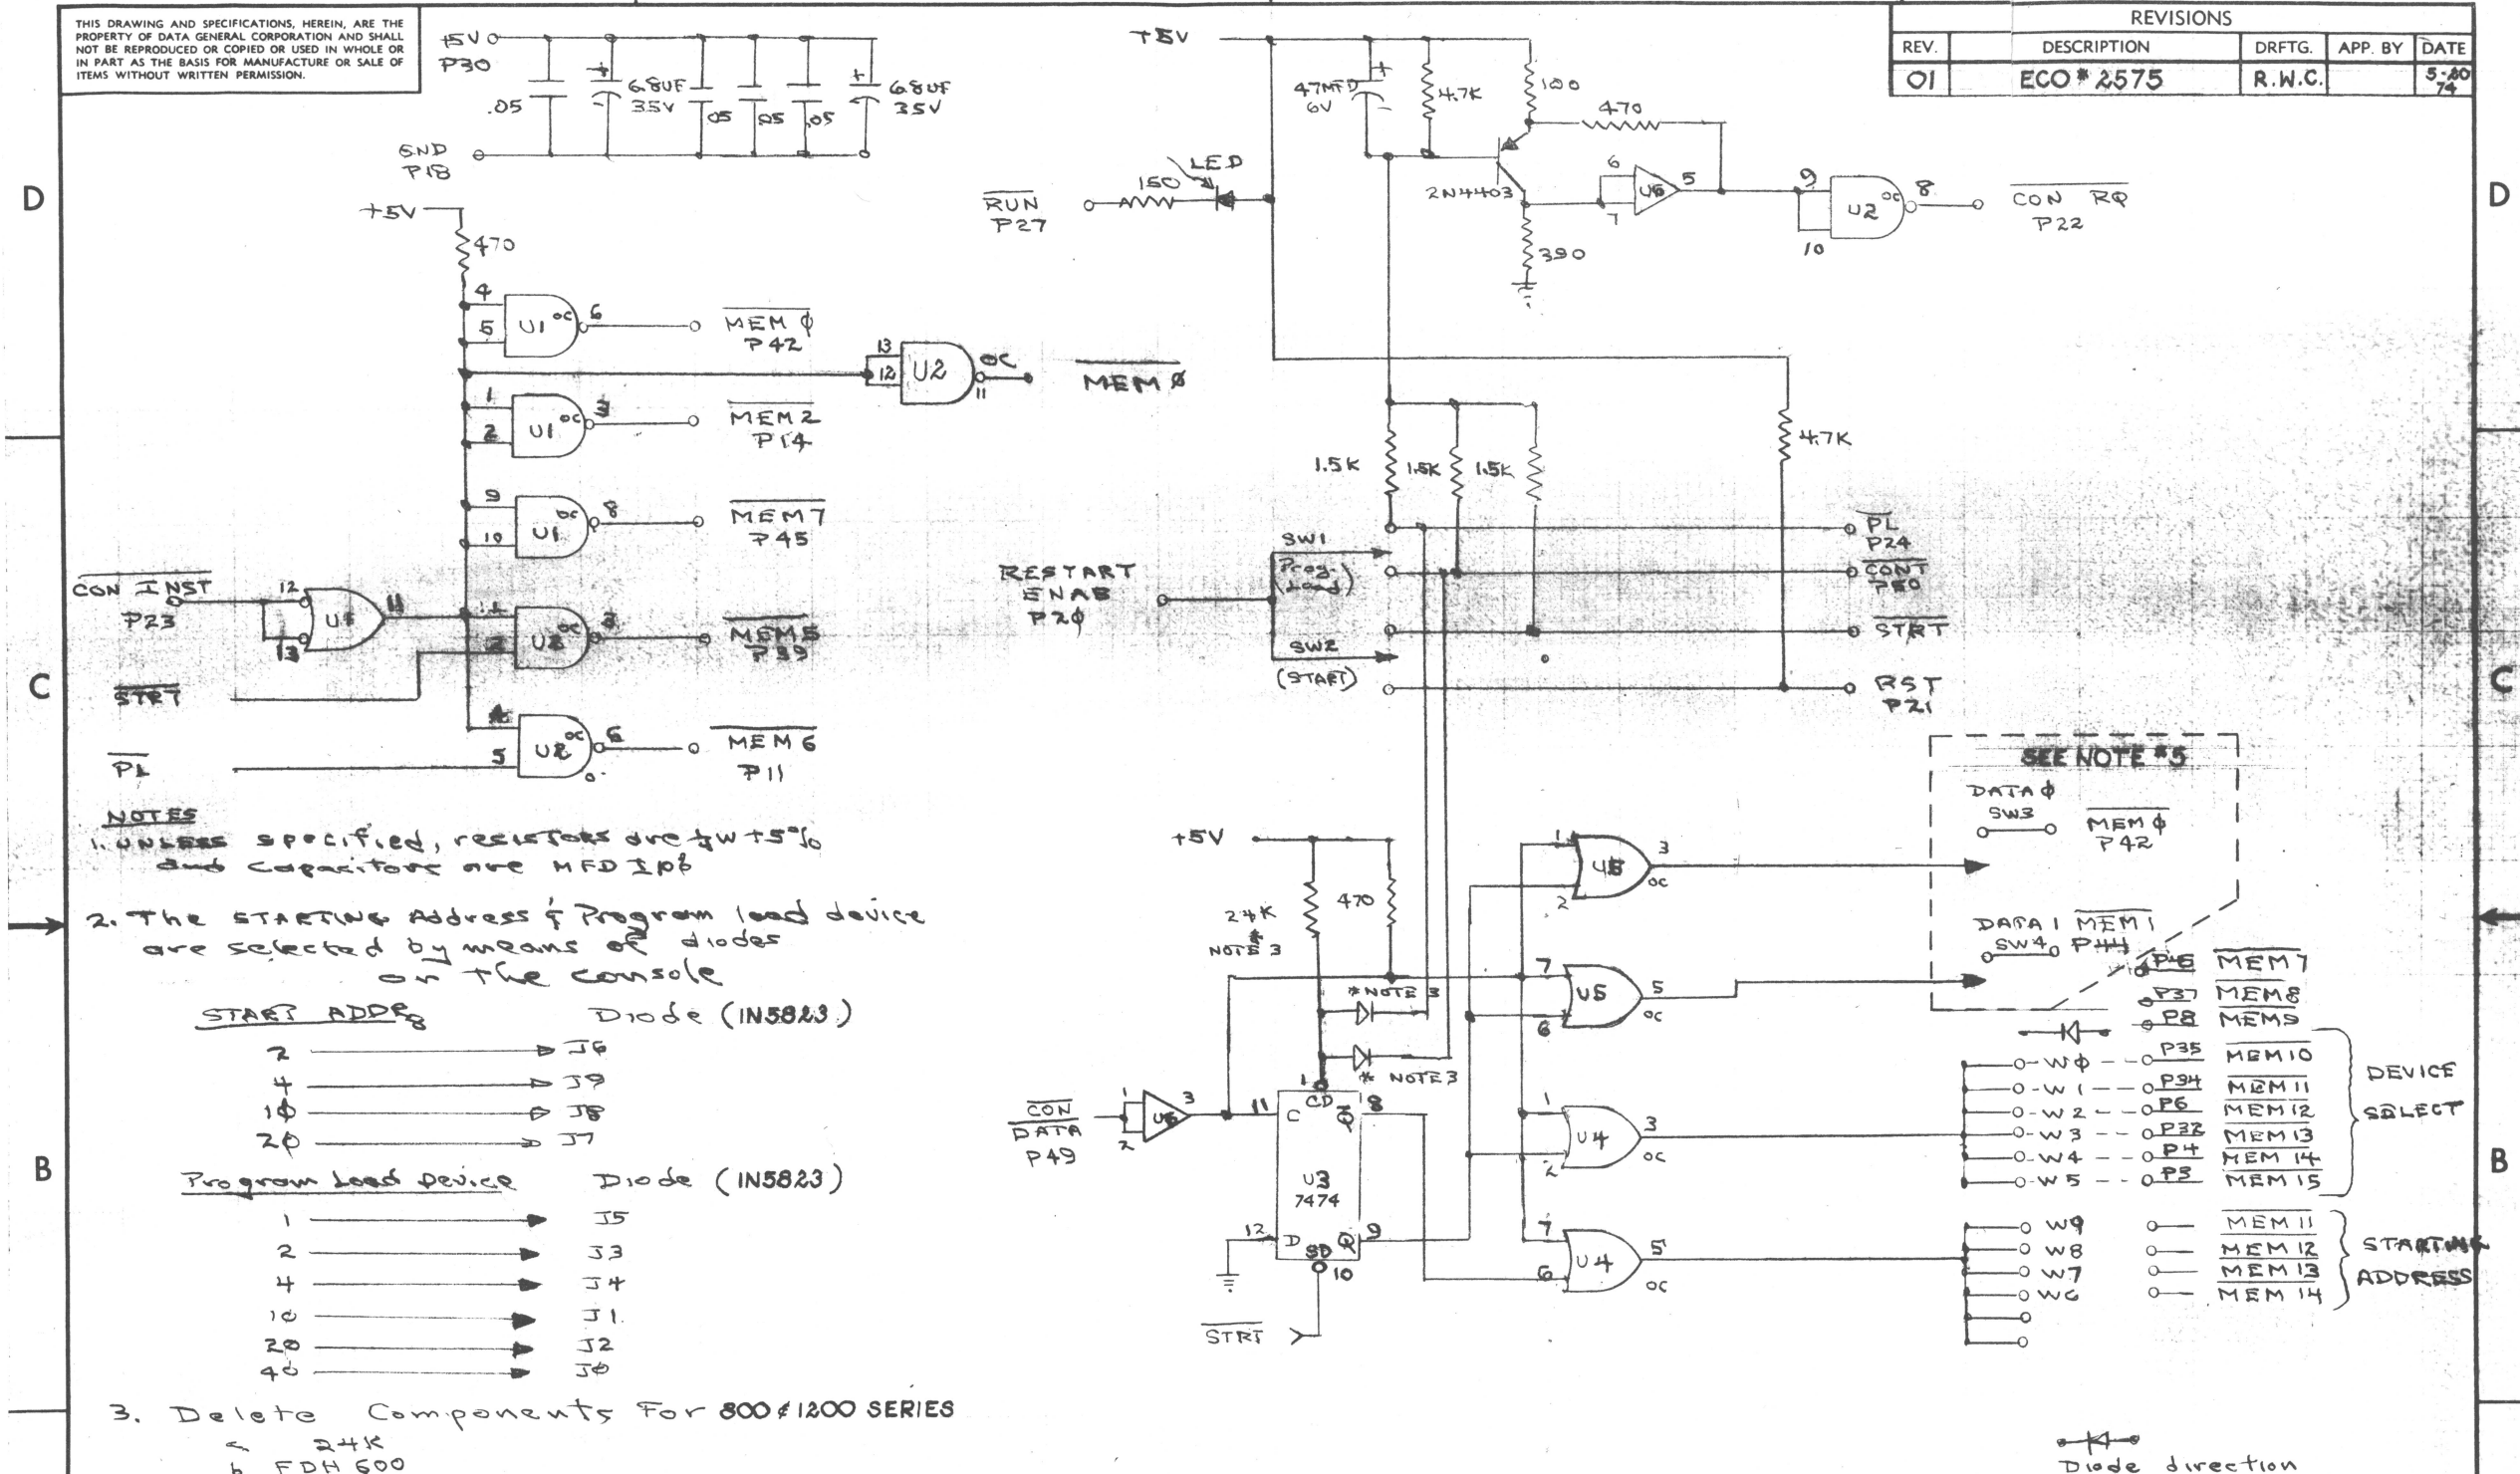

NOTES

- UNLESS SPECIFIED, RESISTORS ARE $\pm 5\%$ AND CAPACITORS ARE MFD $\pm 10\%$
- THE STARTING ADDRESS & PROGRAM LOAD DEVICE ARE SELECTED BY MEANS OF DIODES ON THE CONSOLE

START ADDR	Diode (IN5823)
2	J6
4	J9
10	J8
20	J7

Program Load Device	Diode (IN5823)
1	J5
2	J3
4	J4
10	J1
20	J2
40	J0

3. Delete Components For 800/1200 SERIES

- 24K
- FDH 600
- FDH 600

4. Extended START ADR CAN BE ACCOMPLISHED BY WIRING FROM JUMPER COMMON TO PIN OF CONNECTOR.

5. OPTION: IF THE OPTION IS NOT SPECIFIED AND THE MACHINE IS TO PROGRAM LOAD FROM DCH DEVICE, U5 - PIN3 MUST BE JUMPED TO MEM0.

QTY.	DESCRIPTION	PART NO.
	DRAWN	
	CHECKED	
	ENGINEER	
	APPROVED	
	FIRST USED ON	
	SCALE	

UNLESS OTHERWISE SPECIFIED— DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS DECIMALS ANGLES .XX ± .XXX ± ± PARTS TO BE FREE FROM BURRS BREAK ALL EDGES .010			
UNLESS OTHERWISE SPECIFIED ALL MACH SURFACES			
MATERIAL			
FINISH			

DATA GENERAL CORPORATION SOUTHBORO, MASSACHUSETTS 01772			
TITLE TURN KEY CONSOLE UNIVERSAL			
SIZE	CODE	DRAWING NUMBER	REV.
C	001	000529	01